

# UB-6000R series

UB-6035R

## Next generation standards of personal hygiene

*two separated nozzles*



*aerated gentle wash*



*ultra sonic soldering water-proof seat*



*intelligent occupied seat sensor*



*convenient remote control*



*IIP*



*kids*



*one touch detachable*



Uspa



## Functions




## Features



little differences make big differences...Uspa

## Fitting chart

\* Uspa UB-6000R series may not fit certain toilet bowl designs. Please refer to the dealer sizing and installation chart.

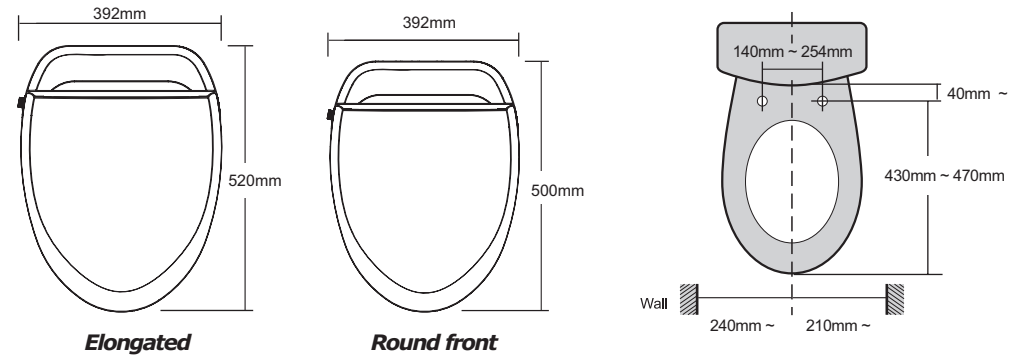

## Specifications

### UB-6035R Elongated Model UB-6035RS Round front model

Power rating	120V, 60Hz, 660W / 230V, 50Hz, 899W
Power cord	1.2m (120V) / 1.8m (230V)
Cleansing features	Posterior wash : 900 + 100 ml / min Feminine wash : 900 + 100 ml / min Tank capacity : 800 ml Water temperature : Room temp - 40 C Heater capacity : 600W (120V) / 836W (230V) Safety features : Thermal cut-off, Thermostat (bi-metal), Floating switch
Dry features	Air temperature : Room temp - 140F (60 C) Heater capacity : 250W (120V, 230V) Safety feature : Bi-metal, Thermal cut-off
Heated seat features	Seat temperature : Room temp - 104F (40 C) Heater capacity : 55W (120V) / 57W (230V) Safety feature : Thermal cut-off Catalytic filter
Air purity features (UB-6035R only)	
Remote control	Infrared remote control
Water supply pressure	10psi - 106psi (0.08mPa - 0.74mPa)
Circuit breaker	Within 15mA - 0.1 second
Net weight	9.7lb (4.4kg)

\* Specifications can be changed without notice.

\* Recommended water supply pressure is between 14psi - 100psi (0.09mPa - 0.68mPa).



manufactured by  
**SAMHONGTECH CO., LTD.**

1488-7, WOOJUNG TOWN 9F, KWANYANG-DONG  
DONGAN-KU, ANYANG-CITY, GYEONGGI-DO  
REP OF KOREA 431-060  
Tel : +82-31-420-2341~5 Fax : +82-31-426-8666  
<http://www.samhongtech.co.kr>

distributed by  
**UCARE S.R.L.**

VIALE PAPINIANO, 44  
20122 - MILANO  
ITALY

<http://www.u-care.eu>